


Fast Track™

Job Sketch Request Form

Overall Length: _____

For multiple systems, indicate individual channel lengths

- Length is critical - do not adjust
- Length can be optimized to use full-length sections

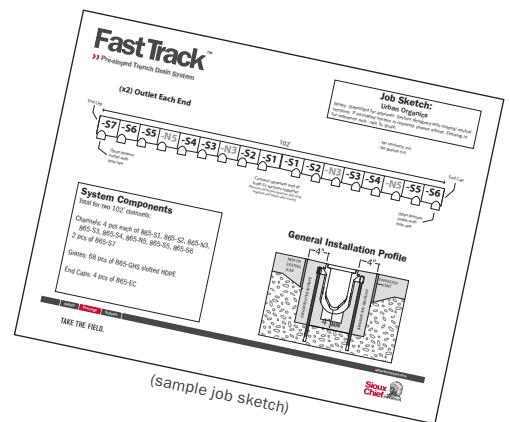


Slope Pattern:

- Slope to One End - Bottom Outlet
- Slope to One End - Side Outlet




- Slope to Center - Single Bottom Outlet



- Neutral (no slope) - Bottom Outlet

- Slope to Each End - Bottom Outlet
- Slope to Each End - Side Outlet




- Slope to Multiple Bottom Outlets (indicate number of outlets)




- Neutral (no slope) - Side Outlet

Grate Type:



- Ductile Iron - Slotted
For loads up to Class C, or Class D with iron frame.




- Ductile Iron - Cross-slot
For loads up to Class C. (ADA)



- Ductile Iron - Diagonal Slot
For loads up to Class C. (ADA/heel-proof)




- Galvanized Steel - Slotted
For Class A loads.



- Galvanized Steel - Perforated
For Class A loads. (ADA/heel-proof)


- Ductile Iron Grate Frames




- Reinforced Galvanized Steel - Slotted
For loads up to Class C.



- Stainless Steel - Slotted
For Class A loads.



- Stainless Steel - Perforated
For Class A loads. (ADA/heel-proof)



- Reinforced Stainless Steel - Slotted
For loads up to Class C



- HDPE - Slotted
For Class A loads.

- Stainless Steel Edge Guards

Special Notes/Instructions:

Use the area below to provide a drawing of the system if needed